



# Blu Studio 5.5 S Front Facing Camera Replacement

This guide involves removing the back case, battery, and inner back case to access the motherboard to remove and replace the front facing camera.

Written By: Cody Dyl



## INTRODUCTION

In this guide you will learn where the front facing camera is located in the Blu Studio 5.5 S, along with how to remove and replace it.

---



### TOOLS:

- [Spudger](#) (1)
  - [Tweezers](#) (1)
  - [Phillips #0 Screwdriver](#) (1)
-

## Step 1 — Back Casing



- In order to remove the back case, start by flipping the phone to the back side and look at it from the top.

## Step 2 — Applying Pressure



- Place your finger in the small notch on the left side of the charging port (facing from the back).
- Once your finger is in the notch, pull the back case towards yourself to remove it.



### Step 3 — Battery




- Once the back case is removed, locate the battery. It is the large brick embedded in the phone. It has BLU Products, a caution statement, and a barcode on it.
- Insert your finger into the notch near the lower left of the battery, apply pressure and lift up.

### Step 4 — Midframe




- The speaker is located behind the inner back case. Using a Phillips #0 screwdriver, unscrew the 10, 7mm screws.
- Using the Phillips #00 screwdriver, unscrew the two, 10mm screws at the bottom.

## Step 5 — Aesthetic Bottom Case

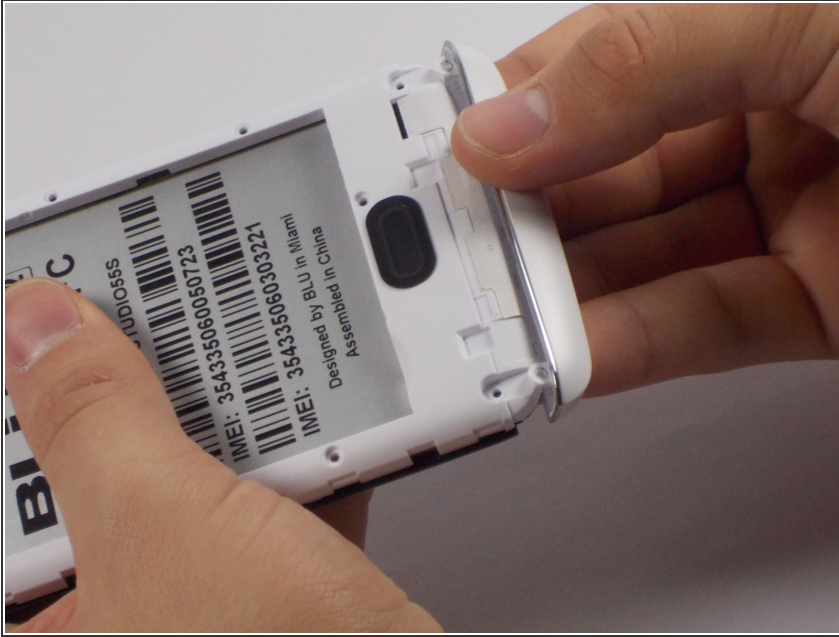



- Apply pressure and pop off the bottom aesthetic case, being careful not to break it.

## Step 6

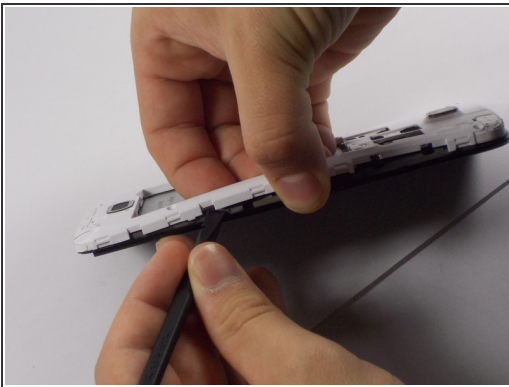

- Use the Spudger to pop the inner back casing off. Do this by lightly raising the side of the battery housing, then sliding the Spudger around the case.
- Pick up the inner back case and flip it over.

## Step 7 — Frontward Facing Camera

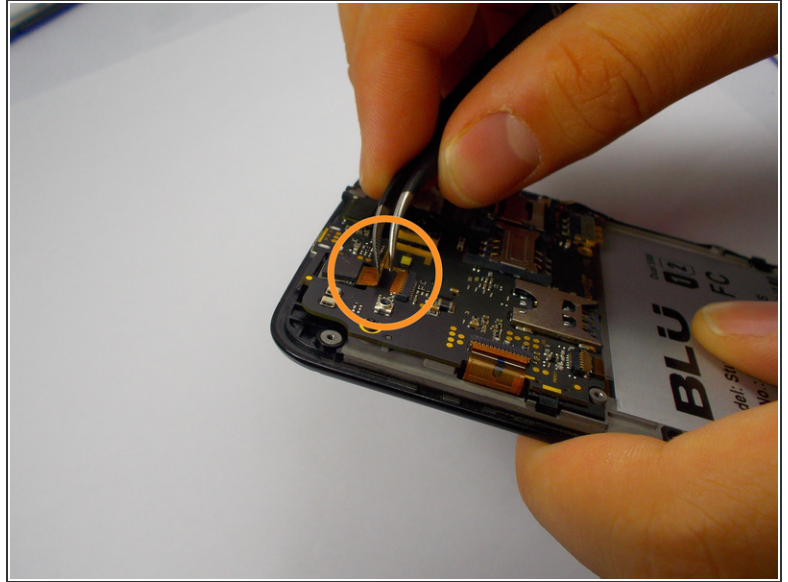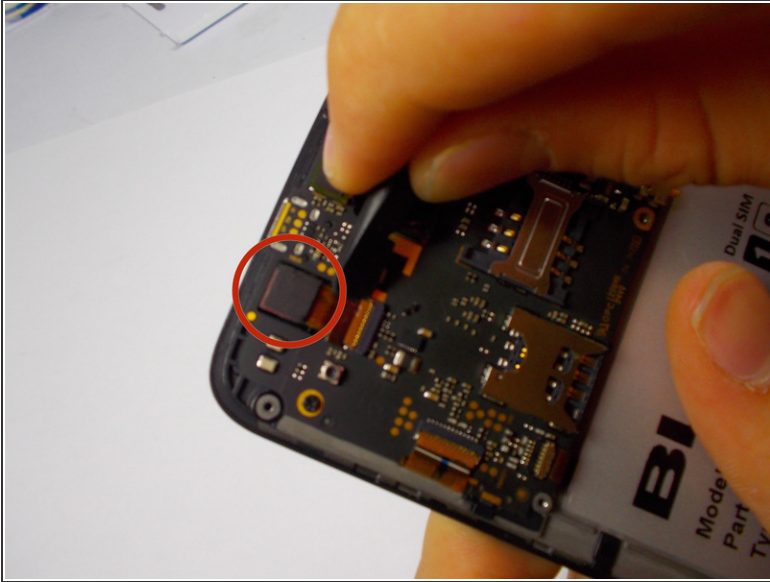

- The frontward facing camera is located in the top left of the phone. It is connected to the motherboard by a ribbon connector, and a prong system.
- Use a spudger to detach the front facing camera by flipping the orange tab on the top of the prong system.
- Once the orange tab is up, pull out the orange ribbon wire.



## Step 8

